



Self Loading Concrete Mixer

CSLM 4800




12,500+
Machines
Sold Globally

BS - V Engine
ARAI Approved

Salient Features

- Specially designed blades for better mixing & faster discharge
- Powered Shovel gate for spillage free charging
- Loading arms mechanism designed for better pushing force & ease of operation while loading
- Single Joystick for all main functions
- Low centre of gravity
- Electronic weigh batching system with printer
- Reversible operator post for better visibility
- Four wheel steering systems, with 3 different modes ideal for working in confined spaces
- Short turning radius
- Live tracking & monitoring system
- Admixture System (optional)
- Cold Starting Kit (optional)
- Rear View Camera (optional)
- ROPS / FOPS Cabin (optional)

Dimensions

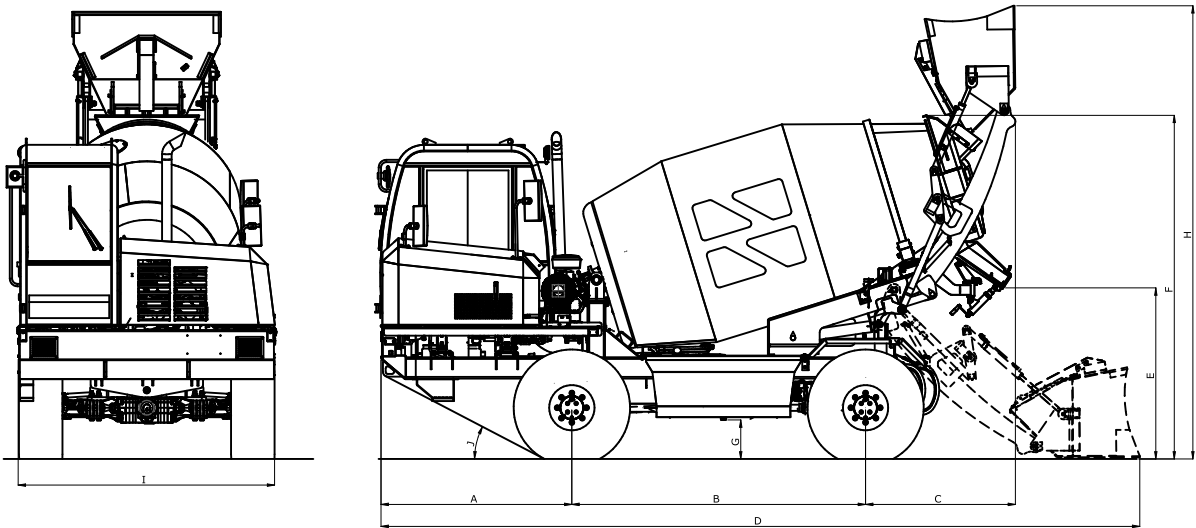

A	1780
B	2750
C	1420
D	7095
E	1610
F	3210
G	370
H	4230
I	2480
J	30°


All Dimensions in mm

Technical Specifications

Sr.	Details	
1	Drum Output per batch	4.8 Cu.M.
2	Drum Rotation	0-22 RPM
3	Bucket Capacity	700 Ltr.
4	Vehicle Speed	0-28 Kmph
5	Braking system	Hydraulic powered brakes
6	Engine	KOEL 4R1190TA1 BS-V Diesel Engine 4 Cylinder Turbocharged, Inter-Cooled 110 HP/81 Kw @ 2200 RPM BS-V Emission Compliant
7	Gradeability	24.5 Deg/45.5%
8	Weighing Technology	Pressure Transducer

Sr.	Details	
9	Tyre & Rim	16.0/70x20, 14PR
10	Fuel Tank	120 Ltr.
11	Hydraulic Tank	112 Ltr.
12	Water Tank	1000 Ltr.
13	Water Pump Capacity	360 pm.
14	Chassis	Box Type
15	Net Vehicle Weight	7690 Kg. Approx
16	Laden Weight	19210 Kg. Approx
17	Drive	Full Time 4 Wheel Drive
18	Wheel base	2750

Note: The technical specifications of the product may vary depending on the model and are subject to change without prior notice

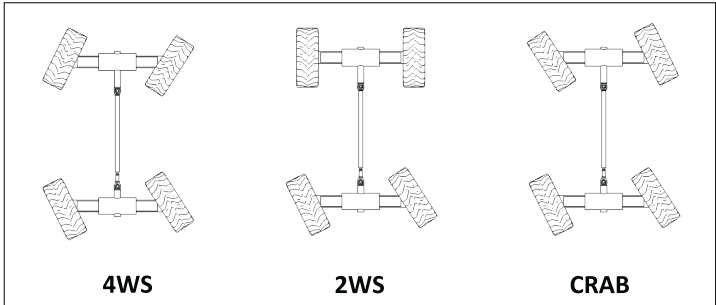

Steering System



Short turning radius



Electronic batch controller

Product Range

