

Proudly Indigenous

Stationary Concrete Pump

★ ★ ★
12,500+
Machines
Sold Globally
★ ★ ★





Salient Features

- Proven S-valve technology
- Suitable for high pressure pumping for toughest Indian ambient conditions
- The Most Compact Pump in It's Class
- Sturdy Undercarriage and Outrigger
- Specially Designed Hopper to facilitate free flow of Concrete for better suction
- Remote Control
- Modular Design of Hydraulic and Diesel Tank
- Shaft Mounted Gear Box and no alignment required
- Safety Grill Open Alarm System
- Hopper and Canopy light for night working
- Superior axle design for safety of pumping cylinder and tie rod
- On screen display of parameters like Pumping hours, concrete output, hydraulic oil temperature, strokes counter and engine speed




	SCP 5000	SCP 7500
A	485	485
B	4865	5515
C	5350	6000
D	1250	1250
E	675	675
F	1790	1790
G	1570	1570
H	2150	2150

All dimensions in mm

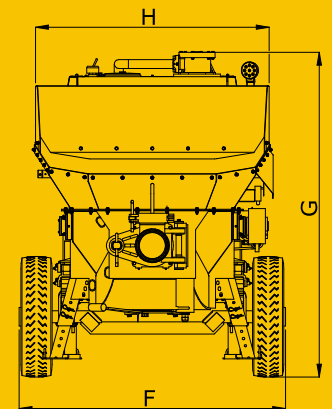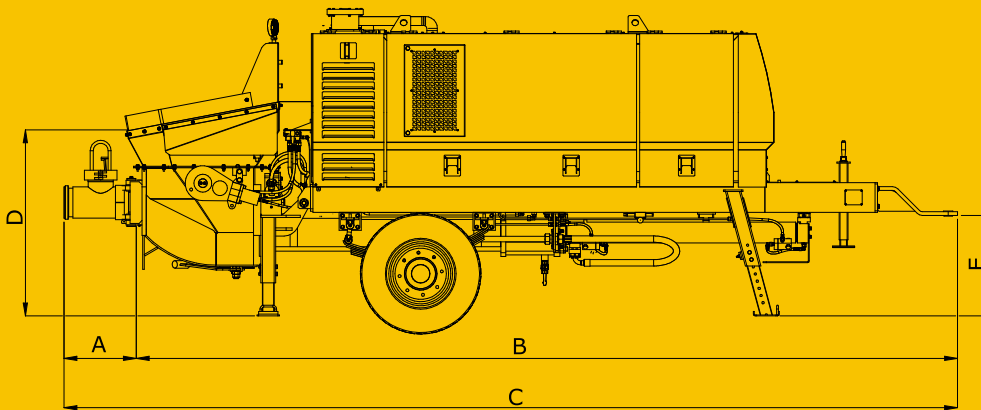

	SCP 5000	SCP 7500
Concrete output (max. theoretical) (m ³ /hr)	49	72
Concrete Pressure (max. theoretical) (bar)	57/85*	71/106*
Delivery cylinder Dia./stroke length (mm)	200/1000	200/1400
Strokes/ minute (max. theoretical)	26/17*	27/18*
Control system	Manual/HMI**	Manual/HMI**
Drive Unit Power (kw)	49	74
Engine Make	Kirloskar	Kirloskar
Hopper Capacity (Ltr)	625	625
Transfer Tube	S-TUBE	S-TUBE
Weight (kg appx.)	3800	4800

*High Pressure Pumping - Optional**



Product Range



0265-6132900, 3000300 sales@conmatindia.com, info@conmatindia.com www.conmatindia.com

ISO Certified :- 9001:2015, 27001:2022 & 45001:2018

Follow us on :     