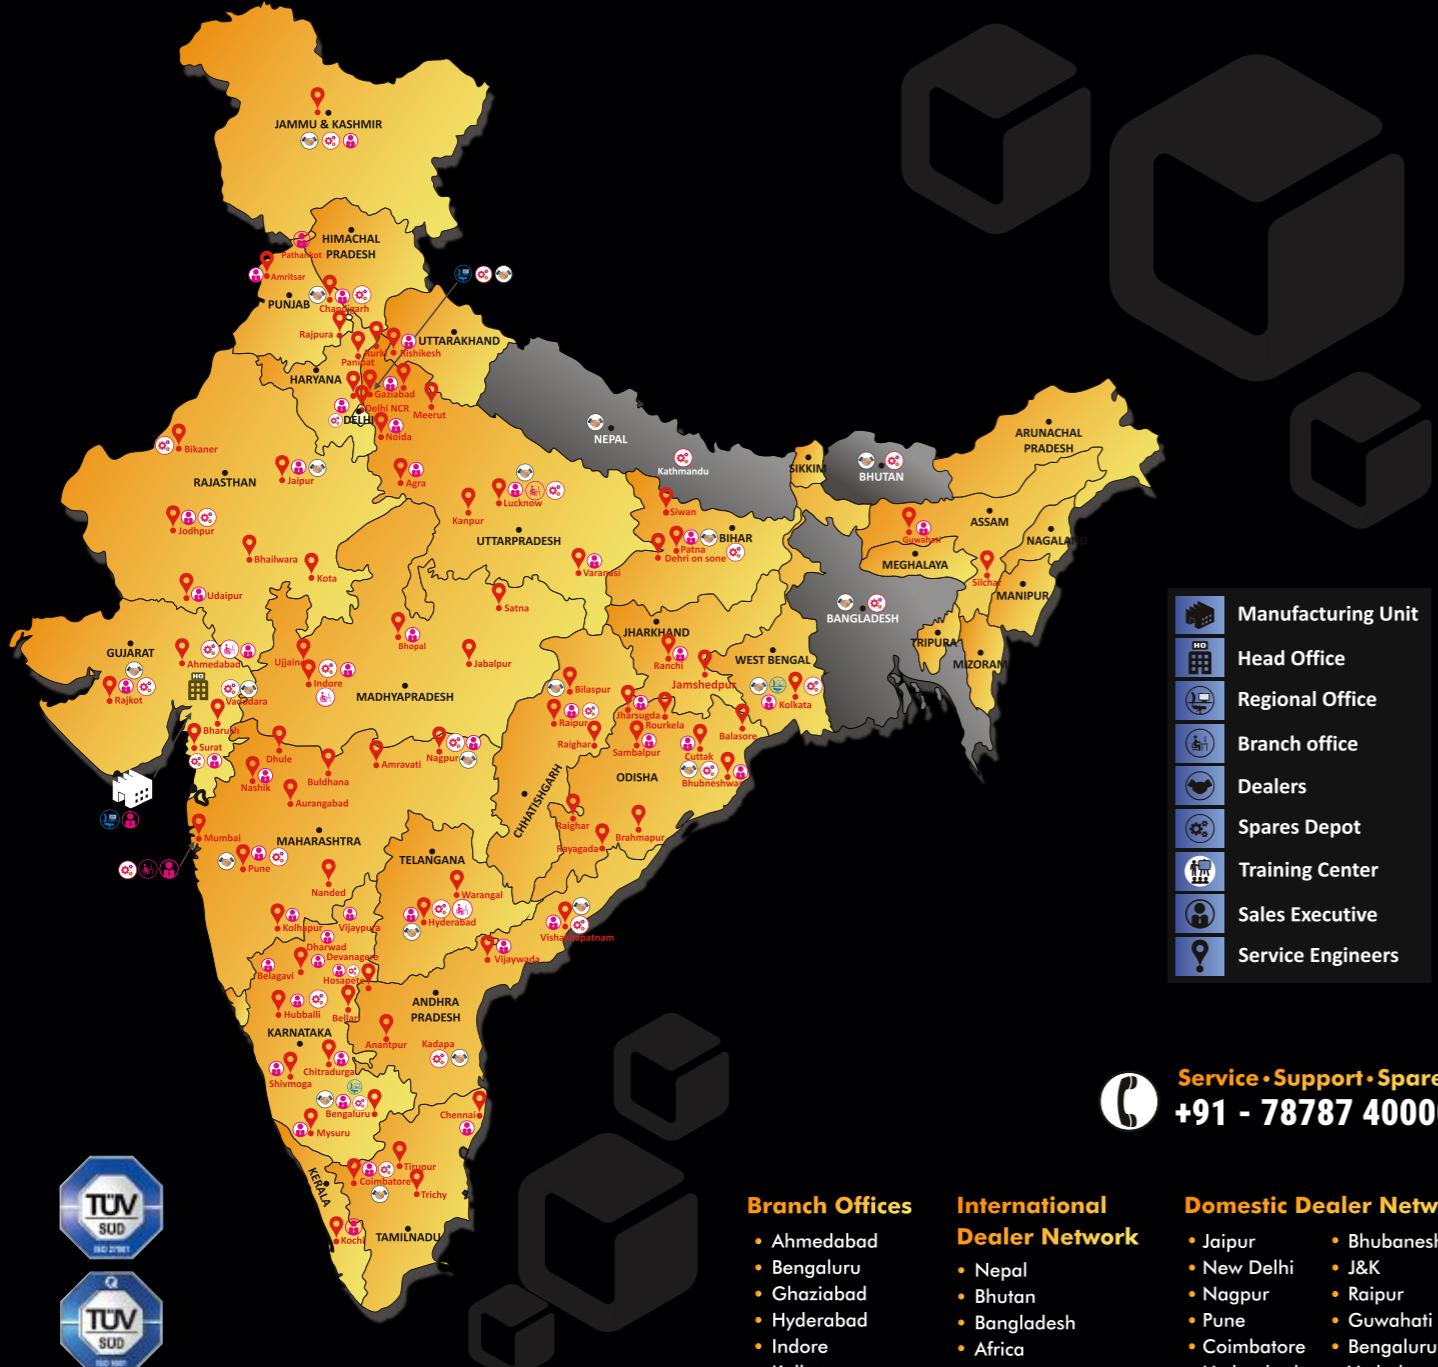


Proudly Indigenous


*Map shown here is only for illustrative purpose & not for official use.

Service • Support • Spares
+91 - 78787 40000

Branch Offices

- Ahmedabad
- Bengaluru
- Ghaziabad
- Hyderabad
- Indore
- Kolkata
- Mumbai

International Dealer Network

- Nepal
- Bhutan
- Nagpur
- Bangladesh
- Africa
- Middle East
- Australia
- South East Asia

Domestic Dealer Network

- Jaipur
- New Delhi
- Rajpur
- Pune
- Coimbatore
- Hyderabad
- Patna
- Durgapur
- Bhubaneshwar
- J&K
- Raipur
- Guwahati
- Bengaluru
- Vadodara
- Rajkot
- Chandigarh



CONMAT HEAVY INDUSTRIES PVT. LTD.
Formerly Known as KYB Conmat Pvt. Ltd.

702-703, N.H. No. 8, Por,
Dist - Vadodara - 391243, Gujarat, INDIA
Ph.: +91-265 - 6132900, 3000300
Email:sales@conmatindia.com
www.conmatindia.com
ISO Certified :- 9001:2015, 27001:2022 & 45001:2018
CIN: U29248GJ2007PTC052387

Product Range



MKT/PC/6/09/07 R8 Nov25

Follow us on :

Note: The technical specifications of the product may vary depending on the model and are subject to change without prior notice.



THE MOST ADVANCED & USER FRIENDLY CONCRETE PAVING MACHINE

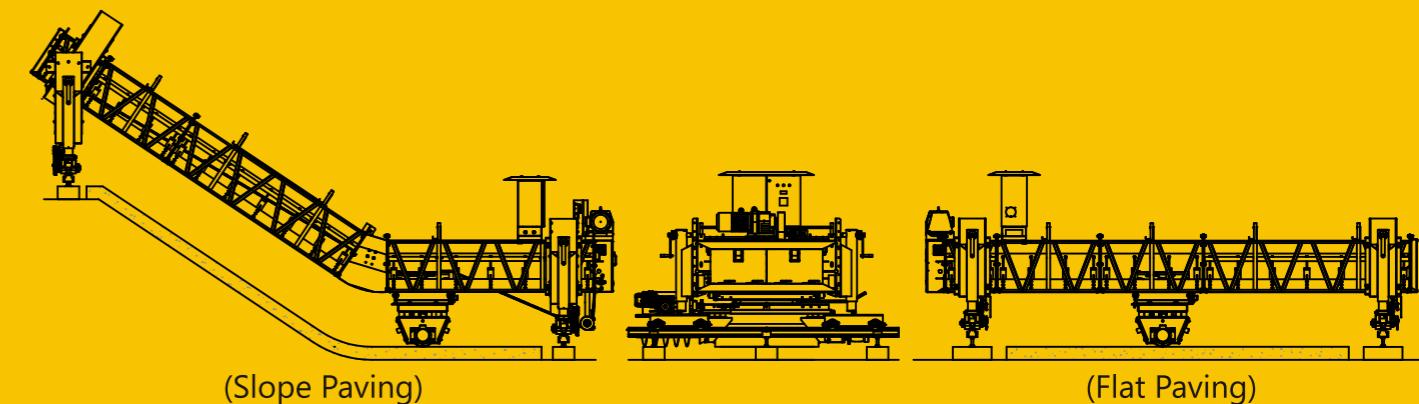

Prime Mover

- 5 HP Geared Motor - Driver End Panel
- 5 HP Geared Motor - Vibratory Cylinder
- 1 HP + 1 HP Geared Motor - Bogie RH & LH
- 1 HP Electric Motor - Vibratory Cylinder

Traction System

- Traction Drive: Two Electrically driven double flanged bogie wheels
- Traction Speed : 0-5 mph

Vibratory Cylinder Under Carriage

- Finished Cylinder 270 mm dia., 1.2 mtr. long precisely balanced
- Extra Long Screw Auger(RH&LH) with hardened flights
- Finishing Tolerance: ± 3 mm in 12ft.

Machine Controls

- Adjustable Carriage Movement with Variable Speed Drive
- Shock Protection
- Overload Protection


Construction

- Frame: All welded, pin connected main frame. Available in length of 2.40 mtr., 1.2 mtr., 0.6 mtr., which are infinitely adjustable up to 62 ft.(CE200) and 110 ft (CE 200 HD/CE 400)
- Finishing Width: Finishing width normally 3ft.(0.9 mtr.) less than frame width and adjustable from 1mtr. to 32mtr.
- Also available for large depth upto 450mm thick slab, span upto 62ft. long adjustable (CE200F) with optional needle/pan vibrator

Optional

- Longitudinal & Transverse Groove Marker
- Longitudinal & Transverse PVC Water Stop inserter Attachment
- Trimmer Attachment
- Transport Assembly
- Slope Wedges

- ◆ FIX FORM concrete paver fitted with Gang Vibrators, is an economical alternative to slip form paver for city and road projects

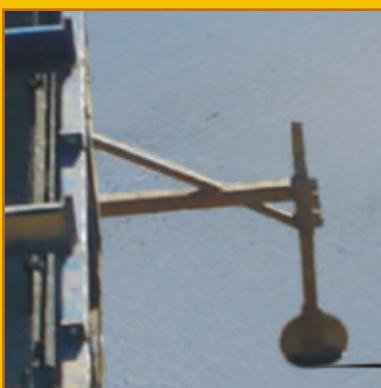

Groove Cutter
(Optional)



PVC Water Stop Attach
(Optional)



Extra Long Paving
(Hardened Auger)



Gang Vibrator
(Optional)



Needle Vibrator
(Optional)



PAN Vibrator
(Optional)

Conmat manufactures exclusive range of standard and customized high performance Paving Machines for slope as well as horizontal surfaces. These world class products are characterized by high efficiency, reliability, as well as solidity. Our dedicated team of engineers ensure excellent support right from installation to commissioning and after sales service.

- Paves Half Width, Trapezoidal Canals & Straight side slopes up to 45 degree angle.
- Rated output 18-20 cu.mtr./hr under ideal conditions and application
- Paves Half Width, Trapezoidal Canals & Straight side slopes up to 45 degree angle.
- Rated output 18-20 cu.mtr./hr under ideal conditions and application