






Salient Features

- Small footprint & low maintenance due to deep bucket conveyor
- Low cycle time due to smaller transfer conveyor leads to higher productivity
- Quick and easy Installation due to fully welded frame structure & pre-assembled main units
- High production performance due to optimized advance automation
- Direct TM loading
- Easy maintenance and low operating cost
- Rapid and easy re-location
- Minimal or No foundation required

Dimensions

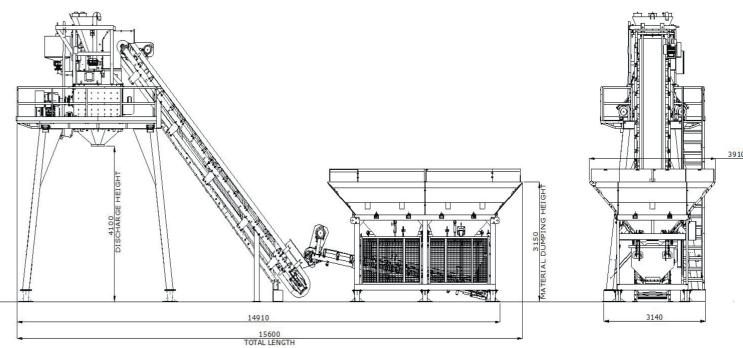

Technical Specifications

Sr.	Details	CDP 300	CDP 450	CDP 600
1	Output Theoretical	30 Cu. Mtr./Hr	45 Cu. Mtr./Hr	60 Cu. Mtr./Hr
2	Bins	4	4	4
3	Charging Conveyor	Side wall cleated belt conveyor	Side wall cleated belt conveyor	Side wall cleated belt conveyor
4	Cement / Filler Weighing System	YES	YES	YES
5	Water Weighing System	YES	YES	YES
6	Admixture Weighing System	YES	YES	YES
7	Mixer	Twin Shaft	Twin Shaft	Twin Shaft
8	Maximum Size of Aggregate	40 MM	60 MM	80 MM
9	Water Sprinkling & Gravity Discharge System	YES	YES	YES
10	Air Compressor	YES	YES	YES
11	Screw Conveyor for Cement	YES	YES	YES
12	Manual Cement Hopper	Optional	Optional	Optional
13	Control System	Automatic	Automatic	Automatic
14	Discharge Height	4.1 Mtr.	4.1 Mtr.	4.1 Mtr.
15	Connected Load	47 Kw	62 Kw	72 Kw

Note: The technical specifications of the product may vary depending on the model and are subject to change without prior notice





















© 0265-6132900, 3000300 **№**

